



WIGGIN MEANS PRECAST CO., INC.



79 BARLOWS LANDING ROAD • P.O. BOX 1507 • POCASSET, MASSACHUSETTS 02559
 Phone (508) 564-6776 • 1-800-564-6774 • Fax (508) 564-6770 • www.wigginprecast.com

SELECTING THE RIGHT BULKHEAD SIZE

JOB REQUIREMENTS:

- 1) Foundation wall opening is 40" wide maximum (all sizes).
- 2) No block foundations
- 3) Adequate access for delivery truck (solid ground conditions), 8' wide truck needs to deploy stabilizers 8' to each side, truck can reach up to 25' to install.
- 4) Stairwell should be 2" to 6" above finished grade.
- 5) Doors will not be installed unless vertical wall is in place, wall must be clear of siding around Bilco Door area.

<u>TYPE</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>D</u>	<u>Outside width Dimension</u>
S	43"	52"	45"	—	51.5"
O	60"	30"	60"	—	51.5"
B	68"	22"	66"	—	55.5"
C	76"	19.5"	74"	—	55.5"
D	84"	22"	86"	12"	55.5"
E	93"	22"	95"	18"	58"
F	101"	22"	104"	30"	58"

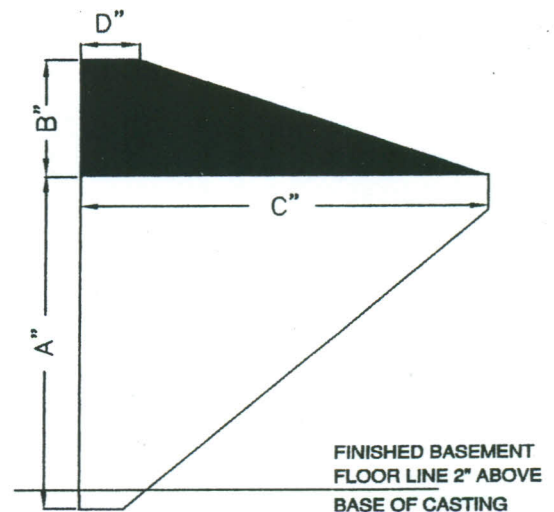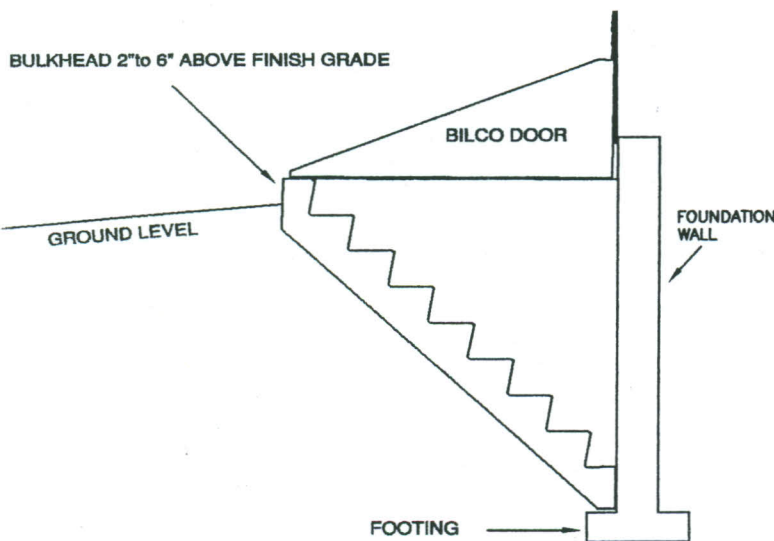

Effective 01/24/13