


WIGGIN MEANS PRECAST CO., INC.


P.O. BOX 1507 POCASSET, MASSACHUSETTS 02559


TEL: 508.564.6776 FAX: 508.564.6770

www.wigginprecast.com

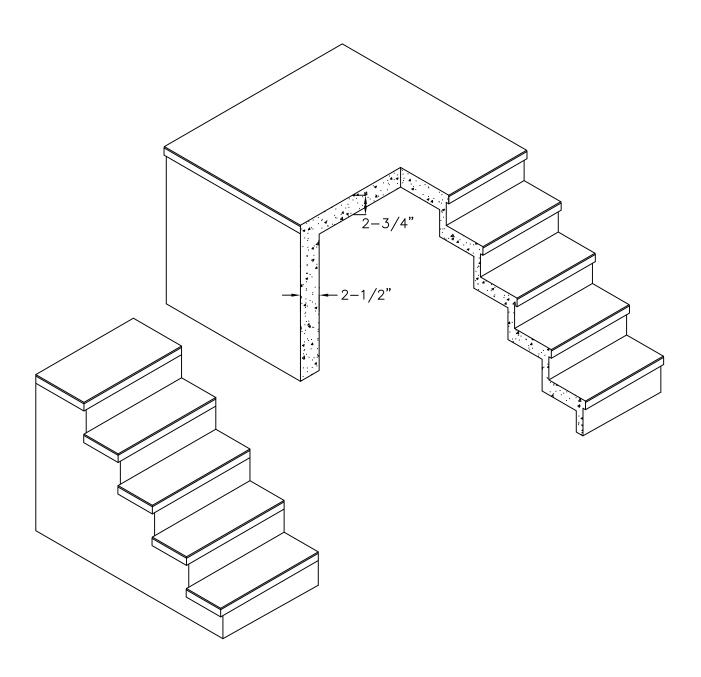


PRECAST CONCRETE STEPS

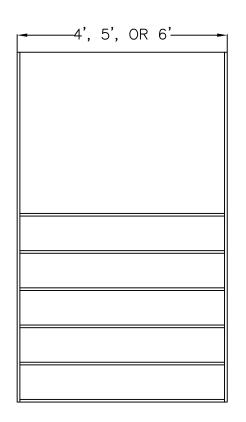

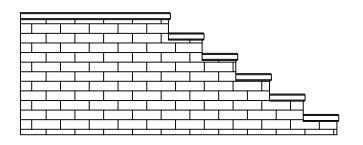

BRICK VENEER AVAILABLE ON SIDES AND RISER FACE

SMALLER PLATFORMS AVAILABLE

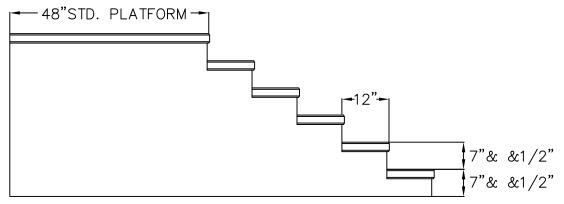

SPECIFICATIONS

- 1.) CONCRETE 5,000 PSI AT 28 DAYS.
- 2.) PORTLAND CEMENT TYPE III
- 3.) STEEL REINFORCEMENT PER ASTM A-615 GRADE 60
- 4.) STEPS ARE AVAILABLE IN 4, 5, or 6 FT. WIDTHS
- 5.) STEPS AVAILABLE TO 42" IN HEIGHT IN 5 OR 6FT. WIDTHS 28" IN HEIGHT IN 4 FT. WIDTH
- 6.) STEPS ARE AVAILABLE WITH IRON RAILINGS