




TEL: 508.564.6776 FAX: 508.564.6770

www.wigginprecast.com




GCC, GCE, GC4S

NOTE "A"
 END SEC: 117-5x2-1/2" HOLES
 CNT'R SEC: 78-5x2-1/2" HOLES


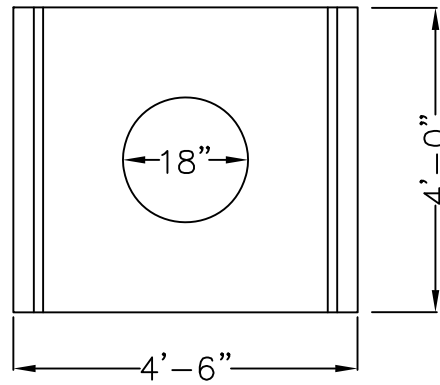


TOP VIEW


CENTER VIEW/END SEC.

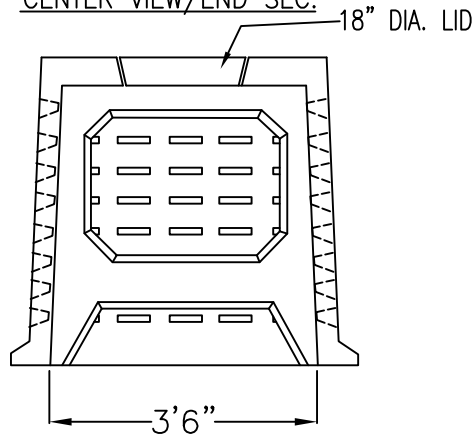

CENTER VIEW/END SEC.

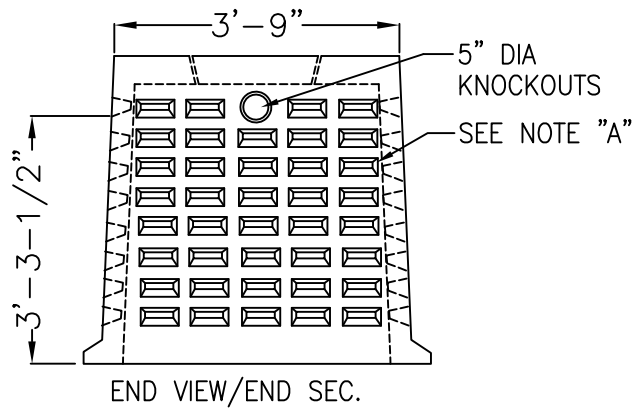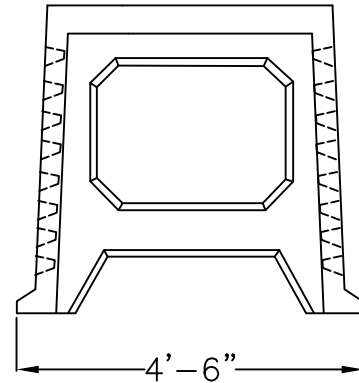

END VIEW/END SEC.

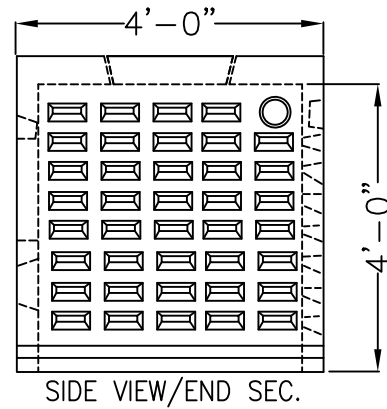

SIDE VIEW/END SEC.

SPECIFICATIONS

- 1.) CONCRETE STRENGTH F'C 5,000 PSI @ 28 DAYS. DENSITY 150 PCF.
- 2.) CEMENT, PORTLAND TYPE I OR III. ASTM C150-81.
- 3.) ADMIXTURES, AIR & PLASTICIZERS @ ASTM C233-82.
- 4.) REINFORCING ASTM A615 FOR WIRE FABRIC, GRADE 60 BAR.
- 5.) DESIGN LOADING AASHTO HS20-44.
- 6.) WEIGHT 2000LBS.